


Tipi di tenuta secondo DIN - ISO - ANSI - BS - JIS

Sealing types according to DIN - ISO - ANSI - BS - JIS

FORM A

- ▶ Tenuta con guarnizione metallica
- ▶ Sealing by metal ring

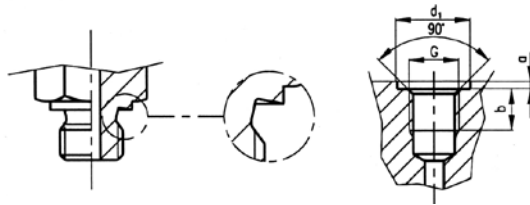

FORM X


DIN 3852-1/2

G	a	b	d ₁	Nm
M10x1	1	8	20	-
ISO 228 G1/4"	1,5	12	25	-

COPPIA TORQUE

FORM B

- ▶ Tenuta meccanica
- ▶ Mechanical sealing

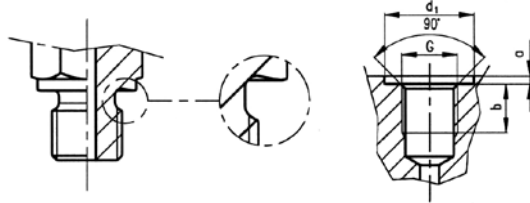

FORM X DIN 3852-2 ISO 1179-1
ISO 9974-1

G	a	b	d ₁	Nm
M12x1,5	1,5	12	18	40
ISO 228 G1/8"	1	8	15,2	25
ISO 228 G1/4"	1,5	12	20	60

FORM C

- ▶ Tenuta sul filetto
- ▶ Sealing by thread



FORM Z

DIN 3852-1/2


G	b	t
ISO 7/1 - R1/8"	5,5	9,5
ISO 7/1 - R1/4"	8,5	13,5
ISO 7/1 - R3/8"	8,5	13,5
M10x1	5,5	10,0

ANSI/ASME B 1.20.1

G	b	t
1/8" - 27 NPTF	-	11,6
1/4" - 18 NPTF	-	16,4
3/8" - 18 NPTF	-	17,4

FORM E

- ▶ Tenuta con guarnizione piana
- ▶ Sealing by fitted ring

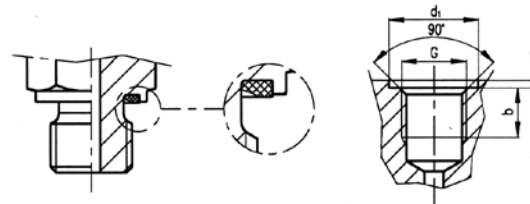


FORM X DIN 3852-2 ISO 1179-1
ISO 9974-1

G	a	b	d ₁	Nm
M10x1	1	8	15	20
M12x1,5	1,5	12	18	40
M14x1,5	1,5	12	20	55
M16x1,5	1,5	12	23	70
ISO 228 G1/8"	1	8	15,2	20
ISO 228 G1/4"	1,5	12	20	55
ISO 228 G3/8"	2	12	23	80

FORM F

- ▶ Tenuta con guarnizione O-ring
- ▶ Sealing by O-ring

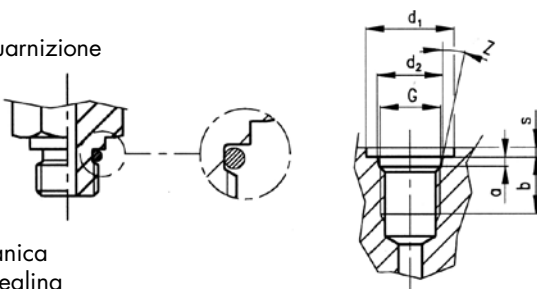


ISO 6149-1

G	a	b	d ₁	d ₂	s	z	Nm
M8x1	1,6	10	14	9,1	1	12°	10
M10x1	1,6	10	16	11,1	1	12°	20
M14x1,5	2,4	11,5	21	15,8	1,5	15°	45

BS 5200

- ▶ Tenuta meccanica
- ▶ mechanical sealing



ISO 11926-1

7/16"-20 UNF	2,4	11,5	21	12,4	1,6	12°	20
1/2"-20 UNF	2,4	11,5	23	14	1,6	12°	25
9/16"-18 UNF	2,5	12,7	25	15,7	1,6	12°	35
3/4"-16 UNF	2,5	14,3	30	20,6	2,4	15°	70

JIS 2351

G 1/4"	2,5	12	/	15,6	/	15°	45
--------	-----	----	---	------	---	-----	----